

LEXTON SPECIFICATIONS

MAO EURO WINDOW Mounted Fan MAO1150

Description

Ventilating fan shall be a quiet window mounted type for window thickness of 3/16" to 11/16". Evaluated by ETL and conforms to both US and CSA safety standards.



Motor / Blower

Axial type 7 blade impeller with 7 1/6" discharge. Automatic shutter opens after 45 seconds after the fan switches on and closes when the fan switches off.

Housing

White, high quality ABS material, integrate component design allow all parts to be dismantled for cleaning without the use of special tools.

Grille

Attractive design utilizing high quality white ABS material.

Typical Specifications

Ventilating fan shall be wall mount with no less than 100 CFM and no more than 2.3 sones as per Home Ventilating Institute (HVI) standards at 0.1" static pressure in inches water gauge. The motor shall be permanently lubricated. Power rating shall be 120V/ 60Hz.

***CAUTION:** Do not place in shower or tub where water can reach.

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

CERTIFICATIONS



Lexton Industries, Inc.


321 W. 135th St.
Los Angeles, CA 90061

Mailing Address:
664-A Freeman Lane PMB # 308
Grass Valley, CA 95949

phone 323 284 2188 / toll free fax 1 866 281 8605




MAO EURO WINDOW Mounted Fan MAO1150

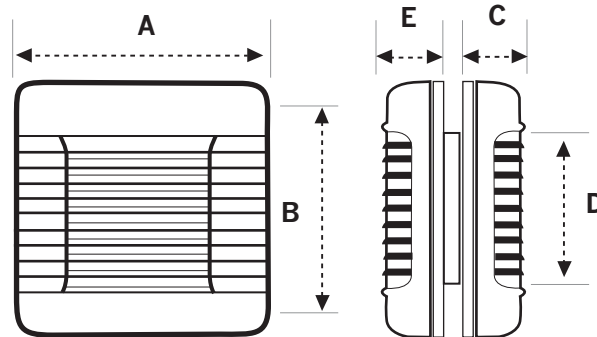

MODEL	A	B	E	C	D
MAO1150	8 3/8"	7 11/16"	2 3/4"	2 1/2"	7 1/16"

MODEL	Airflow CFM	Sones at .1" SP	Max. Watts.	Current (amps)	RPM (nominal)	Volts	Duct Dia.
MAO1150	135	2.3	32.78	0.159	2100	120	4"

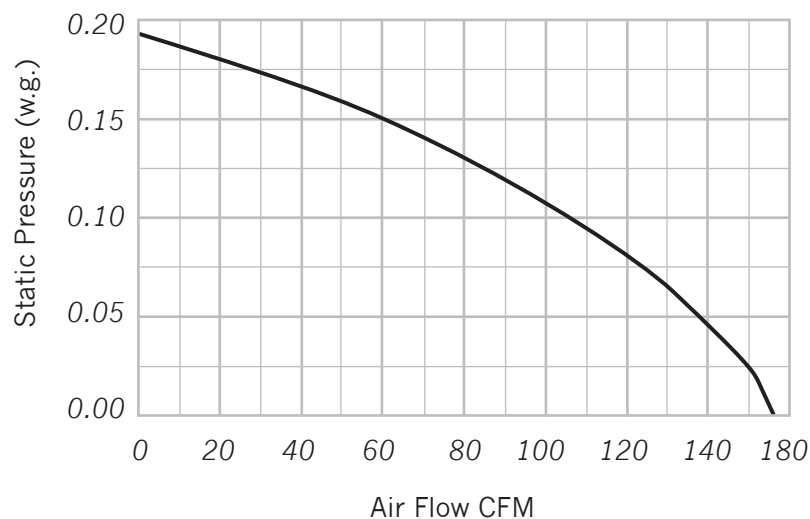

CERTIFICATIONS



Lexton Industries, Inc.

321 W. 135th St.
Los Angeles, CA 90061

Mailing Address:

664-A Freeman Lane PMB # 308
Grass Valley, CA 95949

phone 323 284 2188 / toll free fax 1 866 281 8605

